

High Speed Dome Camera (Indoor)

Products List > D Series > Speed Dome Camera > High Speed Dome Camera (Indoor) > MZC-6118, MZC-IR6118DN, MZC-IR6126DN

MZC-6118 MZC-IR6118DN, MZC-IR6126DN



FEATURES

Mechanical IR Cut Filter
MZC-IR6118DN
MZC-IR6126DN



Option:



MZC-6118 **new**


- ◆ 1/4" 18x Indoor Speed Dome Camera
- ◆ Built-in Sony FCB-EX45 Series Zoom Camera
- ◆ 480TVL/ 1.0Lux@F1.4

MZC-IR6118DN **new**

- ◆ 1/4" 18x Indoor D/N Speed Dome Camera
- ◆ Built-in Sony FCB-EX480 Series Zoom Camera
- ◆ 480TVL/ 0.7Lux@F1.2
- ◆ Mechanical IR Cut Filter

MZC-IR6126DN **new**

- ◆ 1/4" 26x Indoor D/N Speed Dome Camera
- ◆ Built-in Sony FCB-EX980 Series Zoom Camera
- ◆ 480TVL/ 1.0Lux@F1.6
- ◆ Mechanical IR Cut Filter

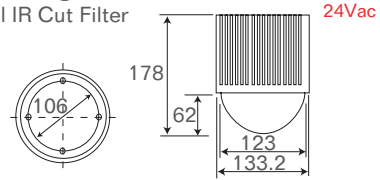

Tol: ±0.5 Unit:mm

SPECIFICATIONS

	MZC-6118		MZC-IR6118DN		MZC-IR6126DN	
	PAL	NTSC	PAL	NTSC	PAL	NTSC
Image Sensor	1/4" Sony Super HAD CCD		1/4" Sony EXview HAD CCD		1/4" Sony EXview HAD CCD	
Number of Effective Pixels	440,000 Pixels	380,000 Pixels	440,000 Pixels	380,000 Pixels	440,000 Pixels	380,000 Pixels
Synchronizing System	Internal		Internal/External(V-Lock)			
Resolution	480 TVL					
Minimum Illumination	1.0 Lux@F1.4		0.7 Lux@F1.2		1.0 Lux@F1.6(50IRE)	
Video Output	1.0Vp-p					
Horizontal Resolution	More Than 480TVL					
Signal-to-Noise Ratio	≥ 50dB					
Electronic Shutter Speed Mode	1/1 ~ 1/10,000sec, 22 steps					
Iris	Auto					
Focus	Auto					
Lens	18x zoom f=4.1mm(wide)~73.8mm(tele),F1.4~F3.0				26x zoom f=3.5mm(wide)~91mm(tele),F1.6~F3.8	
Digital Zoom	12x (216x with Optical Zoom)				12x (312x with Optical Zoom)	
White Balance	Auto					
Black Light Compensation	ON/OFF					
Privacy Zone Masking	ON/OFF (6 Positions)				ON/OFF (24 Positions)	
Night Vision	N/A		IR cut filter removable and slow shutter on			
Panning Range	360° endless					
Panning Speed	0.5° ~240° /sec					
Tilt Range	0° ~100°					
Tilt Speed	0.5° ~120° /sec					
Communication	RS485					
Controls	Pan/Tilt, Lens, 128 preset positions					
Auto Pan	ON/OFF					
Auto Tracking Mode	2 cruising tracks					
Power Supply	AC 24V					
Operation Temperature	-10 °C~50 °C					
Dimensions	133.2(D) x 178(H)mm					
Weight	1.4Kg					