

Kitchen Video System



BB2000



KV2000

The POSIFLEX Kitchen Video System (KV2000) provides an enhanced POS solution to the harsh kitchen environment. It can be used as a self-contained unit controlled by a “back office” computer through an integrated network. It connects to any workstation or file server running application software in Windows CE or WEPOS, and controls the communication to an output device such as a VGA monitor or receipt printer. The KV2000 helps increase speed of service and productivity in the kitchen. The Bump Bar (BB2000) has a spill-resistant keypad which is used to control the access of orders selected, completed, and eliminated from the display.


POSIFLEX™

Kitchen Video System

KV2000 Specifications	
CPU :	AMD LX 700
HDD (optional) :	Default 2.5" 20 GB (upgradeable)
Memory:	DDR SDRAM: Default 128 MB, maximum 1GB in 1 DDR SO-DIMM modules
Video Memory:	Default 16 MB, maximum 254 MB programmed by software
OS Support:	WinCE, WEPOS
Safety Certifications :	CE: Class A; FCC: Class A
Connectivity	
Audio Line Input Port :	1
Audio Line Output Port:	1
LAN Port: (10/100 base T Ethernet)	1 (upgradeable to 1 Gbps)
Parallel Port:	1
Power Input Connector:	1 5.5/2.5 coaxial DC jack for 12 V DC power input
PS2 KB Port:	1
PS2 Mouse Port:	1
Serial Ports:	2
USB Ports:	4 (USB 2.0)
VGA port:	1
Physical Dimensions	
Dimension:	200 mm (W) x 208 mm (D) x 53 mm (H) 7.9" x 8.2" x 2.1"
Weight: (N. W.)	3.1 kg (6.8 lbs)
Environment	
Operating Condition:	0°C~+35°C(32°F~+95°F), 20%RH~80%RH, non-condensing max. web bulb 26°C(78.8°F)
Storage Condition:	-20°C~+60°C(-4°F~+140°F), 10%RH~80%RH, non-condensing max. web bulb 28.9°C (84.0°F)
Options	
Bump Bar:	BB-2000
CF Memory Card:	Yes (Available in 128/256/512 MB, inapplicable when HDD installed)
External CD-ROM:(USB interface)	Yes
Preloaded OS Systems:	Windows CE, WEPOS
Wall Mount Kit:	Included

BB2000 Specifications	
Key Switch Type:	Membrane switch for single large key, membrane switches with metal dome for 4x4 keys
Metal Dome Travel:	0.65mm
Key Size:	11 x 11mm (4 x 4 keys) , 75.83 x 54.67mm (Big Single Key)
Preprinted Keys:	Big Single Key: 1 and 4 x 4 keys as 1;2;3;4;5;6;7;8; 4 screen; 8 screen; split screen' park/status; summary; preview; recall; restore
Colors:	24 keys
Maximum variation:	CE: Class A; FCC: Class A
Programmability	
Method:	Software programming under DOS or Windows
Coverage	All 17 keys
Contents Length:	1 - 255 byte (s) / key
Memory:	Non-volatile memory 8KB
Power Consumption	
Voltage:	5VDC±10%
Current:	100 mA max
Mechanical	
Dimensions:	5.9" (W) x 3.9" (D) x 2.0" (H)
Environment	
Operating Temperature:	0°C~+50°C
Storage Temperature:	-20°C~+70°C
Relative humidity:	90%, non-condensing
Vibration:	4G
Shock:	40G
Reliability Information	
Push Key Switch:	1,000,000 to 3,000,000 strokes min.
Memory:	100 years min.

Network diagram:

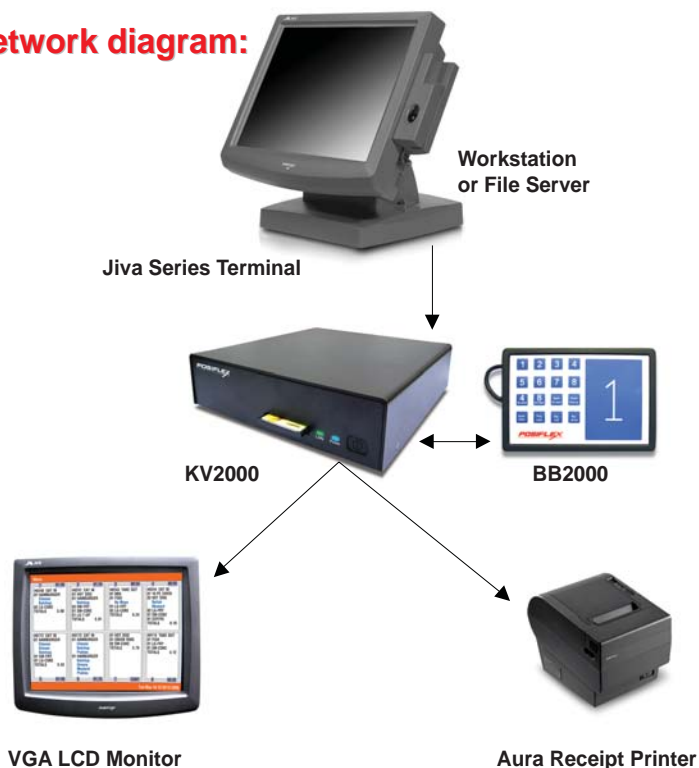

Kitchen Video System Features:

- Compact and rugged metal housing is grease / moisture / insect resistant providing extra reliability and security to the operation
- Fan-less design ideal for harsh kitchen environment
- Utilizing 10/100 Ethernet or for data transmission
- Mounting: Tabletop or wall-mount application
- System can be booted from optional CF card
- Optional 2.5" 20GB HDD (not applicable when CF card installed)
- Power wake-up function through pre-programmed timer, COM port modem or LAN or alarm
- System can be turned off by hardware switch (one main power ON/OFF switch equipped at front)
- Suspension or snooze power saving modes supported

Bump Bar Feature:

- Default 17 programmable membrane keys (16 keys + 1 extra-large key for easy confirmation of data entry)
- 100% true spill-proof structure for kitchen application with KV-2000
- Wall-mount or rack-mount
- Programmable under Windows CE / WEPOS
- PS2 Keyboard connector

About POSIFLEX

POSIFLEX has conducted business worldwide since 1984. A true engineering and design manufacturer of POS products in an ISO 9001/9002/14001 certified factory in Taiwan. POSIFLEX has been awarded 23 patents worldwide for its innovative designs. POSIFLEX integrated POS terminals and peripherals are ideal for hospitality, retail, and a growing number of vertical markets. To learn more about POSIFLEX, please visit www.posiflexusa.com.

POSIFLEX™

1280 San Luis Obispo Avenue
Hayward, California 94544 USA
tel : 510-429-7097
fax : 510-475-0982
e-mail : sales@posiflexusa.com
www.posiflexusa.com